

Cembrit Windstopper Extreme

Datasheet - Build Boards

Cembrit Windstopper Extreme is a special type of build board that features a windproof membrane for exterior walls. The board consists of grey cement and limestone filler, reinforced with a specially selected fibre material that can absorb and release moisture without affecting the durability, strength or performance of the board.

Cembrit Windstopper Extreme has a very low vapour transmission resistance, enabling moisture from inside the building to pass through.


In consequence, insulation can be placed directly against the inner side of the board. The board is powerfully resistant towards both rot and fungal growth and can withstand considerable fluctuations in weather and climate conditions. Adding to this, the Cembrit Windstopper Extreme is non-combustible.

When installed according to Cembrit installation instructions, Cembrit Windstopper Extreme will function as a temporary facade for up to 12 months.


Dimensions

Thickness	mm	4,5	9
Width	mm	900	900
		1200	1200
Length	mm	2700	2700
		3000	3000

Standard sizes

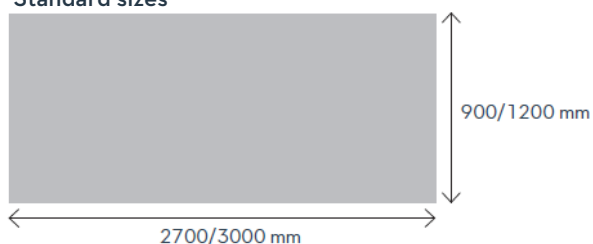

Project sizes

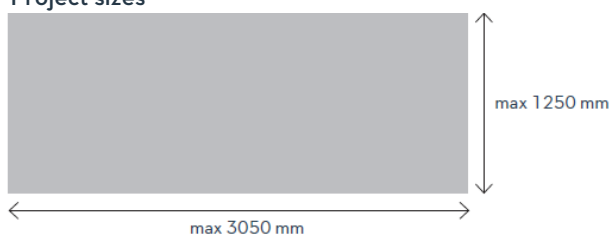

www.cembrit.com

Please visit the local website for contact details and further information.

Cembrit Windstopper Extreme

		WSE 4,5mm	WSE 9mm
Dimension tolerance (EN 12467, Level 1)			
Thickness (up to 20mm)	mm	± 0,6	± 0,9
Width (1000mm <a< 1600mm)	mm	± 0,3% a	± 0,3% a
Length (1600mm < Length)	mm	± 5	± 5
Physical properties			
Density, dry (EN12467), minimum apparent	Kg/m ³	≥ 1400	≥ 1300
Density, dry (EN12467), production average	Kg/m ³	1590	1540
Weight average (Incl. 10% moisture)*	Kg/m ²	7,8	15,2
Moisture content	%	3-10	3-10
Air permability (EN 12114)	m ³ /m ² h Pa	≤ 0,05	≤ 0,05
	Rw (dB)	29	32
Sound Insulation reduction (ISO 717-1-2013)	RW + C (dB)	28	31
	RW + Ctr (dB)	25	28

* nominal value may vary depending on the conditions

Mechanical properties (EN 12467)			
Flexural modulus			
E-module along grain, ambient	GPa	2	4
E-module across grain, ambient	GPa	5	5
E-module along grain, wet	GPa	8	6
E-module across grain, wet	GPa	8	7

Bending strength (EN 12467)			
Along grain, ambient	MPa	16	13
Across grain, ambient	MPa	21	16
Along grain, wet	MPa	8	6
Across grain, wet	MPa	12	8

Thermal properties			
Thermal conductivity (ISO 8301, EN 12667), λ ₁₀	W/(mK)	0,32	0,32
Coefficient of thermal expansion	mm/m °C	0,01	0,01
Frost resistance (max. cycles, EN12467)	Cycles	100	100
Frost resistance (average along/across)	RL	>0,75	>0,75

www.cembrit.com

Please visit the local website for contact details and further information.

Cembrit Windstopper Extreme

		WSE 4,5mm	WSE 9mm
Hygrothermal properties			
Water absorption (24 hrs 105°C, 24 hrs in water)	%	20	21
Moisture movement (30/90 % RH, EN12467)	mm/m	0,55	0,42
Moisture movement (wet-dry-wet)	mm/m	2,6	2,3
Water impermeability (EN12467)	Visual	No water drops	No water drops
Water vapour transmission properties (EN 12572-C)			
Vapour transmission resistance (Z-value)	GPa m ² s/kg	2,1	2,7
Vapour transmission resistance	s/m	15600	19700
Vapour diffusion equivalent air layer thickness	Sd (m)	0,41	0,50
Vapour resistivity	MN s/(gm)	448	301
Vapour resistance factor, μ		87	82
Vapour resistance	MN s/(gm)	2,1	2,7
Vapour transmission	USPerm	8,3	8,0
Fire properties			
Reaction to fire (EN13501-1)	Rating	A2-s1, d0	A2-s1, d0
Fire protection classification (EN13501-2)	Rating	NA	K1 10 K2 10 *K2 30
* Two layer, 12mm Multi Force fixed directly to the substrate + 9mm Windstopper Extreme facing the fire exposure			
Other properties			
Category, Class (EN12467)		NT A1 I	NT A1 I

www.cembrit.com

Please visit the local website for contact details and further information.